



IDEAL APPLICATION COMMERCIAL & RESIDENTIAL




Installation ease with impeccable results makes our JM 1000 roof system a standout choice. The 1-1/2" Snap Lock profile and JM-1000 Clip create a continuous interlocking system that installs quickly, reducing labor costs. The concealed fastener and clip application also allow thermal expansion and contraction movement to help keep the beautiful finish straight and true.



JM-1000 PROFILE



JET METALS
ROOF & WALL SYSTEMS

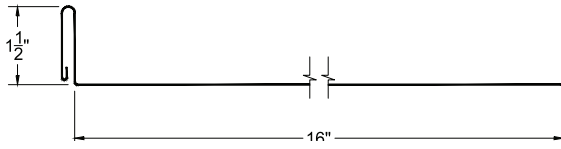

Testing in accordance with



AVAILABLE WIDTHS

Standard: 16" Optional: 12". Other widths available, call for more information.*

*Design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.jetmetals.com.

SUBSTRATES AVAILABLE

- Galvalume® - 24ga
- Drexlume® - 24ga



FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths
Optional: striation, beads, pencil ribs

INSTALLATION

Can be installed over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE

Minimum slope 3:12

MINIMUM ROOF PITCH

3:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third-Party Verified
- Florida Building Code Approved