




### IDEAL APPLICATION RESIDENTIAL, INSTITUTIONAL & STRUCTURAL

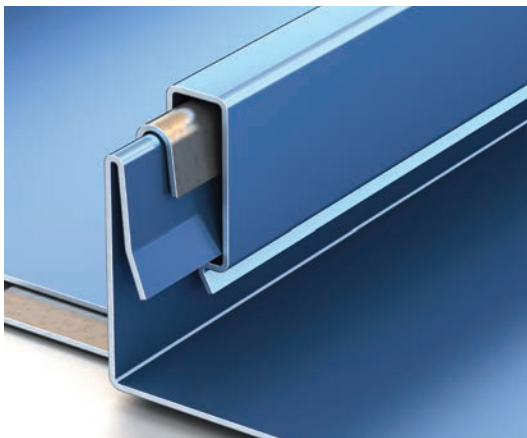

### WEATHER TIGHTNESS WARRANTY APPROVED!

The JM-2000 is distinctive for its broad width seam, impressive structural capabilities and easy Snap Lock installation. Featuring a 1-3/4" seam height, this continuous interlocking engineered roof system has a concealed fastener and clip application that allows thermal movement and requires no mechanical seaming to ensure weathertight integrity. The installation is simple and quick, yet it withstands extremely high design pressures and is approved for use on Weather Tightness Warranty projects.




# JM-2000 PROFILE



**JET METALS**

ROOF & WALL SYSTEMS

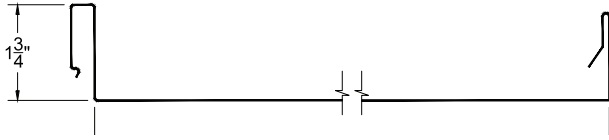

### AVAILABLE WIDTHS

Standard: 14", 16" or 18" Other widths available, call for more information.\*

\*Design pressures, wind, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at [www.jetmetals.com](http://www.jetmetals.com)

### SUBSTRATES AVAILABLE

- Galvalume® - 22ga and 24ga
- Drexlume® - 24ga
- Aluminum - .032" and .040"



### FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

### GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY  
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

### ALUMINUM SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY  
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

### DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

### PRODUCTION OPTIONS

Factory made or field rolled to exact lengths  
Optional: striation, beads, pencil ribs

### INSTALLATION

Can be installed over open frame steel purlins, steel decking, steel decking with PolyIso or plywood decking.

### SLOPE

Minimum slope 2:12




### MINIMUM ROOF PITCH

1/2:12 - low roof pitch

### ALLOWABLE UNIFORM:

Inward load table - psf

Span	2.00	2.50	3.00	3.50	4.00	5.00	5.00
24 gax16"	251	201	145	108	83	66	53
24 gax18"	205	131	90	66	50	39	32

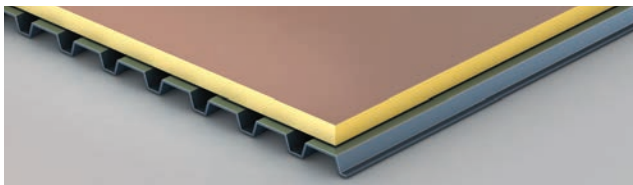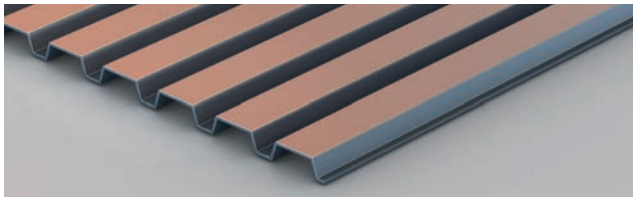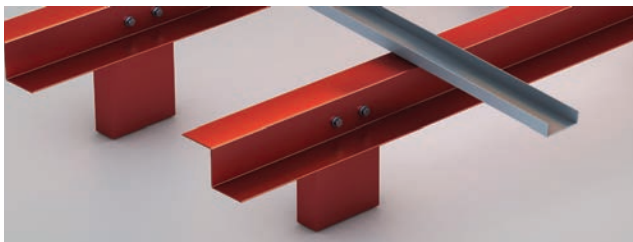

Testing in accordance with



### TESTING

- UL 580 Wind Uplift (Class 90)
- TAS 125 Wind Uplift
- UL 1897 Extended Phase Wind Uplift
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third Party Verified

- ASTM E1646 Water Infiltration
- TAS 100 Wind Driven Rain
- ASTM E1680 Air Infiltration
- ASTM E1886 Missile Impact
- ASTM 2140 Static Pressure Water Head
- Miami-Dade County Approved
- Florida Building Code Approved
- Texas Department of Insurance Approval