


Featuring an authentic “Key West” aesthetic, this traditional roof system is a long-time favorite for its functionality and style. The generous 24” panel span, 3/8” rib height and exposed fastener design together achieve an attractive finish that will stand up strong to harsh weather year after year.





Testing in accordance with

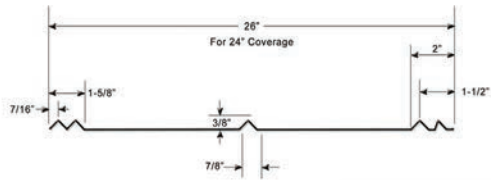

AVAILABLE WIDTHS

Standard: 24" Other widths available, call for more information.*

*Design pressures, wind uplifts and test reports are for specific attachments, material gauges, screw spacing and panel widths.

SUBSTRATES AVAILABLE

- Galvalume® - 24ga and 26ga
- Drexlume® - 24ga and 26ga
- Aluminum - .032 and .040



FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths

INSTALLATION

Can be installed over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE

Minimum slope 3:12

MINIMUM ROOF PITCH

3:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third-Party Verified
- Florida Building Code Approved