




IDEAL APPLICATION RESIDENTIAL



Our Jet-Lok profile offers unlimited design potential with its sleek, crisp appearance and attractive shadow lines. Eliminating the need for metal roof clips, the concealed 1" self-locking Snap Lock system creates a powerfully protective seal. Versatile and refined, this easy-to-install metal roof delivers superior beauty, durability and strength while showcasing architectural details.

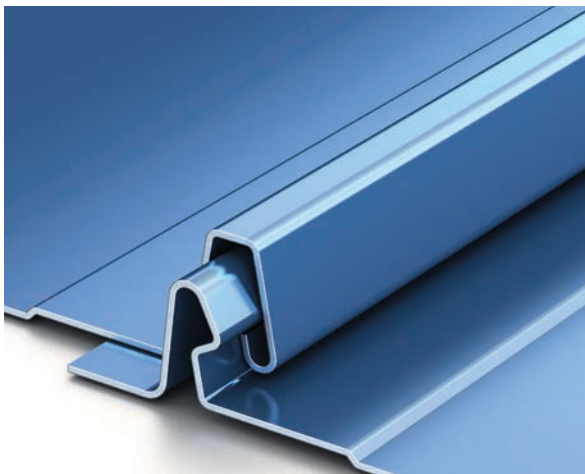


JET-LOK PROFILE



JET METALS

ROOF & WALL SYSTEMS



AVAILABLE WIDTHS

Standard: 16" Optional: 12"

*Design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.jetmetals.com.



SUBSTRATES AVAILABLE

- Galvalume® - 24ga and 26ga
- Drexlume® - 24ga
- Aluminum - .032"



FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

ALUMINUM SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths

Optional: striation, beads, pencil ribs

INSTALLATION

Can be installed over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE

Minimum slope 3:12

MINIMUM ROOF PITCH

3:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third-Party Verified
- Florida Building Code Approved



MetShield
Underlayment



Testing in accordance with

